

# EXPOSED FASTENING SYSTEMS

## 5V CRIMP



The 5V Crimp roof panel offers an ideal old-time, residential appearance. 5V Crimp is also an aesthetically-pleasing solution for light commercial applications. The 5V Crimp panels require a solid roof deck with a waterproof membrane.

### FEATURES AND BENEFITS:

- UL 580 rating is available, as well as UL 790, Class A for external fire, roof assembly for UL 263 for internal fire and the UL 2218 Class 4 impact rating.
- 5-V Crimp carries Florida and Dade County approvals.

### PRODUCT SPECIFICATIONS

**Applications:** Roof

**Coverage Widths:** 24"

**Rib Spacing:** 12" on center

**Rib Height:** 1/2"



**Minimum Slope:** 3:12

**Panel Attachment:** Exposed Fastening System

**Gauges:** 29 (standard); 26 (optional)

**Finishes:** Smooth (standard)

**Coatings:** Galvalume Plus®, Signature® 200

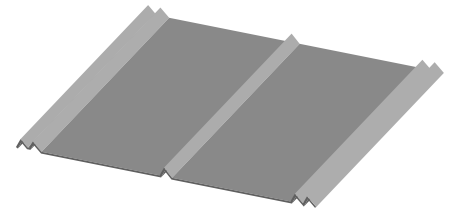

METALLIC BUILDING COMPANY  
7301 Fairview St. | Houston, TX 77041  
866-800-6353  
sales@metallic.com  
[METALLIC.com](http://METALLIC.com)



# EXPOSED FASTENING SYSTEMS

## 5V CRIMP

CATEGORY	CHARACTERISTIC	TEST METHOD	PURPOSE	RESULT
<b>ENVIRONMENTAL</b>	Impact Resistance	UL 2218	Determines Impact Resistance of prepared Roof Covering Materials	Class 4 Rating
	Room Fire Performance	UL 790	Standard for Standard Test Methods for Fire Tests of Roof Coverings	See Class A Fire Rating Data Sheet
<b>FIRE RESISTANCE</b>	Room Fire Performance	UL 263	Standard for Fire Tests of Building Construction and Materials	For use in Design Nos. P225, P227, P230, P237, P265, P268, P508, P510, P512, P701, P711, P720, P722, P726, P731, P734, P801, P815, P819.
	Uplift Resistance	AISI S100	Provides a standard procedure to evaluate or confirm structural performance under uniform static air pressure difference	See Section Properties and Allowable Load Table Section
<b>STRUCTURAL</b>	Gravity Loads	AISI S100	North American Specification for the Design of Cold-Formed Steel Structural Members	See Section Properties and Allowable Load Table Section
	Roof Performance - Underwriters Laboratories	UL 580	Determines the uplift resistance of roof assemblies consisting of the roof and roof coverings materials	Class 90 Rating - Construction Number 453.
<b>ROOF LISTINGS</b>	Roof Performance - Miami-Dade County	TAS 125 TAS 100	The Product Control Approval System establishes a protocol to evaluate the standards of products used in construction in Miami-Dade County. Miami-Dade County, with its inclusion in the High Velocity Hurricane Zone (HVHZ) has the most stringent code requirements of the Florida Building Code. Therefore, all products that comprise the structure's building envelope — doors, shutters, windows, prefabricated buildings and truss plates — require the issuance of an approval in order to be used for construction in Miami-Dade County	See NOA # 11-0810.10
	Roof Performance - Florida Approval	TAS-125 UL 580 UL 1897 U790	Florida product approval is the approval of products and systems, which comprise the building envelope and structural frame, for compliance with the structural requirements of the Florida Building Code.	See FL# 11903.1
	Roof Performance - Texas Department of Insurance	UL 580 UL 1897	TWIA provides windstorm and hail insurance in areas exposed to hurricanes and currently provides windstorm and hail coverage in the following 14 "first tier" Texas coastal counties: Aransas, Brazoria, Calhoun, Cameron, Chambers, Galveston, Jefferson, Kenedy, Kleberg, Matagorda, Nueces, Refugio, San Patricio and Willacy.	See RC-392

Descriptions and specifications contained herein were in effect at the time this publication was approved for printing. In a continuing effort to refine and improve products, Metallic reserves the right to discontinue products at any time or change specifications and/or designs without incurring obligation. To ensure you have the latest information available, please inquire or visit our website at [www.metallic.com](http://www.metallic.com). Application details are for illustration purposes only and may not be appropriate for all environmental conditions, building designs or panel profiles. Projects should be designed to conform to applicable building codes, regulations and accepted industry practices. If there is a conflict between this document and project erection drawings, the erection drawings will take precedence.