

# SOFFITS

## FLEXLOC®



Available in 8½-inch, 9½-inch or 10½-inch widths, the FlexLoc® panel is clipped down to a waterproofed solid substrate, when used in roof applications.

### FEATURES AND BENEFITS:

- Because the panels are generally run parallel to the curved surface, no pre-curving of the FlexLoc® panel is required.
- For the designer who wants a barrel vault with a smooth look (no standing seams) and horizontal lines instead of vertical, curved FlexLoc® is the recommended product. It's ideal for curved applications or soffits.
- FlexLoc® is a non-structural panel.

### PRODUCT SPECIFICATIONS

**Applications:** Roof, Fascia, Soffit


**Coverage Widths:** 8½", 9½", 10½"

**Panel Attachment:** Concealed Fastening System

**Gauges:** 24 (standard); 22 (optional)

**Finishes:** Smooth (standard); Embossed (optional)

**Coatings:** Galvalume Plus®, Signature® 200, Signature® 300, Signature® 300 Metallic

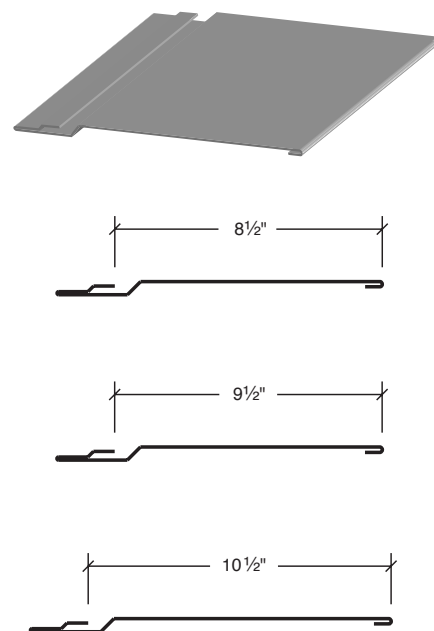

**METALLIC BUILDING COMPANY**  
7301 Fairview St. | Houston, TX 77041  
866-800-6353  
sales@metallic.com  
**METALLIC.com**



Descriptions and specifications contained herein were in effect at the time this publication was approved for printing. In a continuing effort to refine and improve products, Metallic reserves the right to discontinue products at any time or change specifications and/or designs without incurring obligation. To ensure you have the latest information available, please inquire or visit our website at [www.metallic.com](http://www.metallic.com). Application details are for illustration purposes only and may not be appropriate for all environmental conditions, building designs or panel profiles. Projects should be designed to conform to applicable building codes, regulations and accepted industry practices. If there is a conflict between this document and project erection drawings, the erection drawings will take precedence.