

COMMERCIAL DOOR 2000

LIGHT DUTY COMMERCIAL GRADE DOOR

SERIES

DBCI's Commercial Steel Curtain Roll-Up Door Solutions:

1900 Series (1950 Insulated)

- 26-gauge Grade E galvanized steel
- Low overhead solution

2000 Series (2250 Insulated)

- 16-gauge galvanized steel drums with steel ball bearings
- 26-gauge Grade E galvanized steel

2500 Series (2750 Insulated)

- Heavy duty
- 10-gauge steel slide bolt lock
- Width up to 18 feet

3000 Series (3250 Insulated)

- Moderate to high wind load
- 80 degree windlock design

5000 Series (5250 Insulated)

- Aluminum bottom bar with steel angle reinforcement
- Wind-rated

The 2000 Series is the perfect door for light duty applications that require frequent use. These low-maintenance doors are ideal for warehouses, car washes, machine shops, auto body shops, and more. DBCI's commercial-grade steel curtains are designed to meet or exceed operational requirements, and the 16-gauge 12" drums are easy to retract and maintain.




Integrity. Partnership. Quality.



Curtain

- 26-gauge galvanized, Grade E hard steel
- 5/8" ribbed corrugation
- Maximum opening size of 12' x 18'
- Flexible wear strips




Bottom Bar

- 6063 – T6 aluminum extrusion
- 2" x 1 1/2" 11-gauge galvanized steel angle
- Bulb astragal
- Stainless steel nuts and bolts



Axle-Drum Assembly

- 1 5/16" O.D. steel axle, 14-gauge
- 11-gauge axle on doors over 10' wide
- Utilizes 12", 16-gauge drums
- Shielded steel ball bearings in drums
- Full top sheet



A.C.E. Guide System

- 16-gauge galvanized steel
- Adjustable bolt on head stop
- Polyethylene wear strip
- Pre-punched for lock and attachment fasteners

Hardware

- Saddle clamps with set fasteners
- 10-gauge slide locks; 2 per door
- 16-gauge step plates; 2 per door
- 1/4" steel angle T-bracket





Technical Notes

- Doors up to 10' have 20" of headroom
- Doors 10' to 14' have 22" of headroom
- Doors over 14' have 24" of headroom
- Doors require up to 24" of vertical clearance and 10 1/2" of side room. Smaller doors may require less. For specific measurements, contact DBCI at 800.542.0501



Options

- Insulated 2250 Series
- 1900 Series – low overhead option
- Chain hoist 4:1 reduction
- Vision panels (17" x 5")
- Top draft stop
- Side draft stop
- Hood
- Steel mounting plates
- Electric operator




NOTE: The 2000 is not rated for wind loads. Please see 2500, 3000 or 5000.




Also available with insulation (2250 Series)


INTERIOR ELEVATION

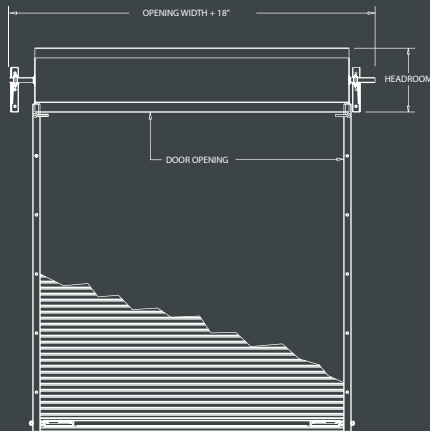


GUIDE DETAIL



DOOR ENGAGEMENT



GUIDE MOUNTING

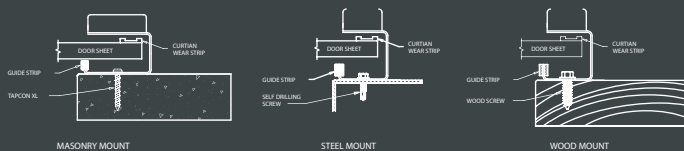

INSULATED DOOR DETAIL

